


# Spectrum Analyzer

## RSA306 USB Real Time Spectrum Analyzer Datasheet

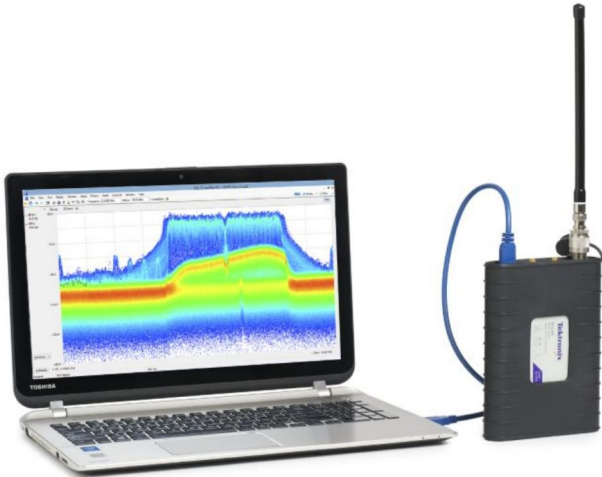

The RSA306 uses your PC and Tektronix SignalVu-PC™ RF Signal Analysis Software to provide real time spectrum analysis, streaming capture and deep signal analysis capabilities for signals from 9 kHz to 6.2 GHz, all in a low-cost, highly portable package that is ideal for field, factory, or academic use.

### Key performance specifications

- 9 kHz to 6.2 GHz frequency range covers a broad range of analysis needs
- +20 dBm to -160 dBm measurement range
- Captures interference to ensure that you see problems first time, every time
- Mil-Std 28800 Class 2 environmental, shock and vibration specifications for use in harsh conditions

### Key features

- Full-featured spectrum analysis capability with included Tektronix SignalVu-PC™ software
- 27 spectrum and signal analysis measurements standard
- Options for mapping, modulation analysis, WLAN and Bluetooth standards support, pulse measurements, and frequency settling
- Real time Spectrum/Spectrogram display to minimize time spent on transient and interference hunting
- Application programming interface (API) included for Microsoft Windows environments
- MATLAB instrument driver for use with Instrument Control Toolbox
- Streaming capture records long-term events

### Applications

- Academic/education
- Maintenance, installation and repair in the factory or field
- Value-conscious design and manufacturing
- Interference hunting

### The RSA306: a new class of instrument

The RSA306 offers full-featured spectrum analysis and deep signal analysis at a price unmatched by any previous offering. Using the latest in commercial interfaces and available computing power, the RSA306 separates signal acquisition from measurement, dramatically lowering the cost of instrument hardware. Data analysis, storage and replay is performed on your personal computer, tablet or laptop. Managing the PC separately from the acquisition hardware makes processing upgrades easy, and minimizes IT management issues.

### SignalVu-PC™ software and an API for deep analysis and fast programmatic interaction

The RSA306 operates with SignalVu-PC, a powerful program that is the basis of Tektronix performance signal analyzers. SignalVu-PC offers a deep analysis capability previously unavailable in value-priced solutions. Real-time processing of the DPX spectrum/spectrogram is enabled in your PC, further reducing the cost of hardware. Customers who need programmatic access to the instrument can choose either the SignalVu-PC programmatic interface or use the included application programming interface (API) that provides a rich set of commands and measurements. A MATLAB driver for the API is available, enabling operation with MATLAB and the Instrument Control Toolbox.


### Measurements included in SignalVu-PC base version

Basic functionality of the free SignalVu-PC program is far from basic. The table below summarizes the measurements included in the free SignalVu-PC software.


General signal analysis	
Spectrum analyzer	Spans from 100 Hz to 6.2 GHz Three traces plus math and spectrogram trace Five markers with power, relative power, integrated power, power density and dBc/Hz functions
DPX Spectrum/Spectrogram	Real time display of spectrum with 100% probability of intercept of 100 µsec signals in up to 40 MHz span
Amplitude, frequency, phase vs. time, RF I and Q vs. time	Basic vector analysis functions
Time Overview/Navigator	Enables easy setting of acquisition and analysis times for deep analysis in multiple domains
Spectrogram	Analyze and re-analyze your signal with a 2-D or 3-D waterfall display
AM/FM listening	Hear, and record to file, FM and AM signals
Analog modulation analysis	
AM, FM, PM analysis	Measures key AM, FM, PM parameters
RF measurements	
Spurious measurement	User-defined limit lines and regions provide automatic spectrum violation testing across the entire range of the instrument
Spectrum emission mask	User-defined or standards-specific masks
Occupied Bandwidth	Measures 99% power, -xdB down points
Channel Power and ACLR	Variable channel and adjacent/alternate channel parameters
MCPR	Sophisticated, flexible multi-channel power measurements
CCDF	Complementary Cumulative Distribution Function plots the statistical variations in signal level

### The RSA306 with SignalVu-PC offers basic and advanced measurements for field and lab


See what you've never seen before: The 40 MHz real time bandwidth of the RSA306 combined with the processing power of SignalVu-PC shows you every signal, even down to 100 µs in duration. The following image shows a WLAN transmission (green and orange), and the narrow signals that repeat across the screen are a Bluetooth access probe. The spectrogram (upper part of the screen) clearly separates these signals in time to show any signal collisions.

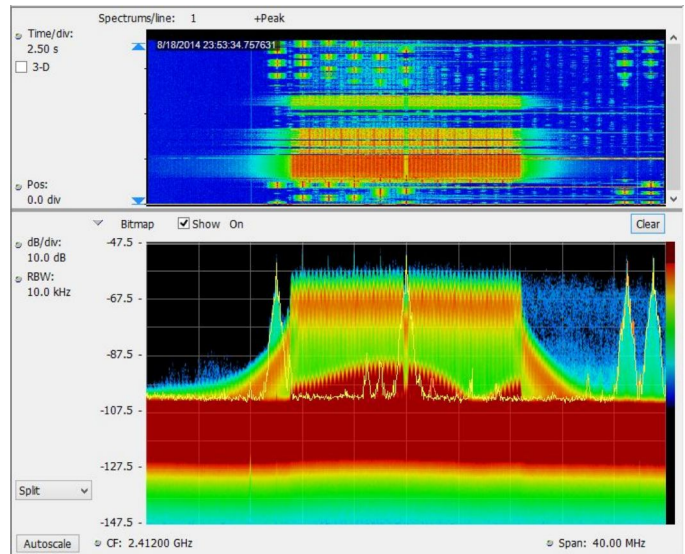

Monitoring has never been easier. Spectrum mask testing captures detail of transients found in the frequency domain, such as intermittent interference. Mask testing can be set to stop acquisition, save acquisition, save a picture, and send an audible alert. The following image shows a spectrum mask (in orange on the spectrum display) created to monitor a band of frequencies for violations. A single transient of 125 µs duration has occurred that violated the mask, with the violation shown in red. The transient is clearly seen on the spectrogram above the red violation area (circled).

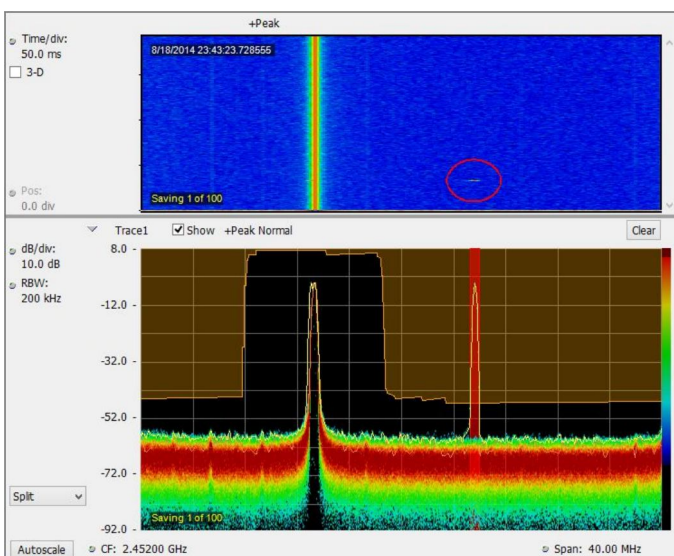

Analysis of AM and FM signals is standard in SignalVu-PC. The following screen shot shows a 1 kHz tone amplitude modulating a carrier to 48.9% total AM. Markers are used on the spectrum display to measure the modulation sideband at 1 kHz offset, 12.28 dB down from the carrier. The same signal is simultaneously viewed in the modulation display, showing AM versus time, with +Peak, -Peak and Total AM measurements. Advanced measurements for analog audio modulation including SINAD, THD and modulation rate are available in Option SVA.

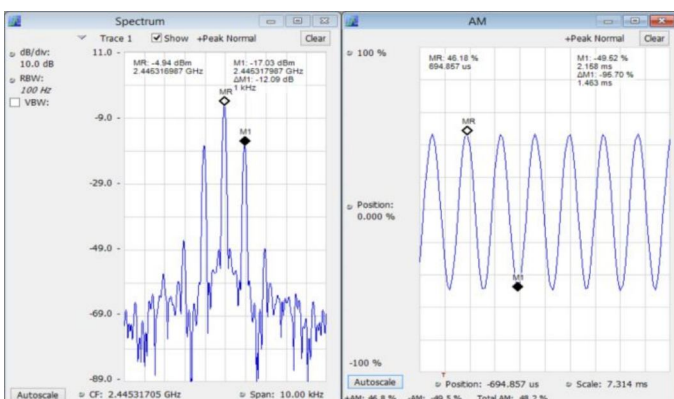


## SignalVu-PC application-specific options


SignalVu-PC offers a wealth of application-oriented measurement and analysis options including:

- General-purpose modulation analysis (27 modulation types including 16/32/64/256 QAM, QPSK, O-QPSK, GMSK, FSK, APSK)
- P25 analysis of phase I and phase 2 signals
- WLAN analysis of 802.11a/b/g/j/p, 802.11n, 802.11ac
- Bluetooth® analysis of Low Energy, Basic Rate and Enhanced Data Rate
- Mapping and signal strength
- Pulse analysis
- AM/FM/PM/Direct Audio Measurement including SINAD, THD

The following screen shot shows the standard Channel Power/ACLR measurement combined with optional modulation analysis to show spectrum measurements plus a constellation display and vector signal quality measurements on a QPSK signal.

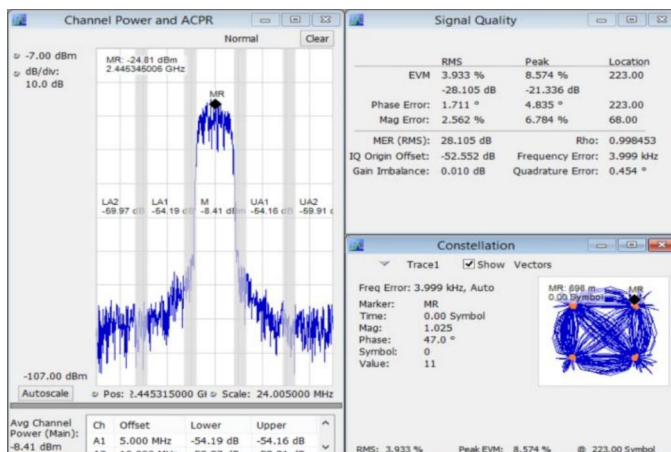


SignalVu-PC Option SV26 enables quick, standards-based transmitter health checks on APCO P25 signals. The following image shows a Phase II signal being monitored for anomalies with the spectrum analyzer while performing transmitter power, modulation and frequency measurements.

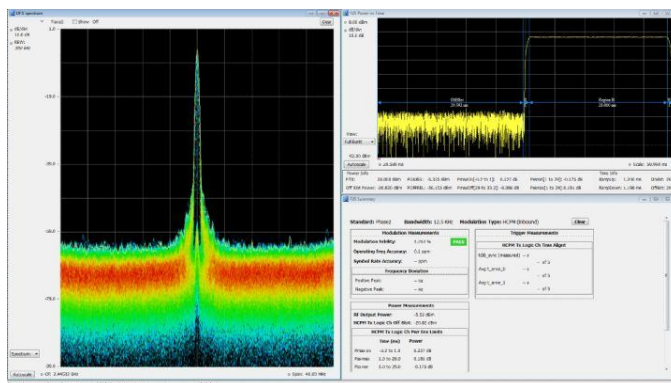




# RSA306 USB Spectrum Analyzer

Sophisticated WLAN measurements are easy. On the following 802.11g signal display below, the spectrogram shows the initial pilot sequence followed by the main signal burst. The modulation is automatically detected as 64 QAM for the packet and displayed as a constellation. The data summary indicates an EVM of -33.24 dB RMS, and burst power is measured at 10.35 dBm. SignalVu-PC options are available for 802.11a/b/j/g/p, 802.11n and 802.11ac to 40 MHz bandwidth.

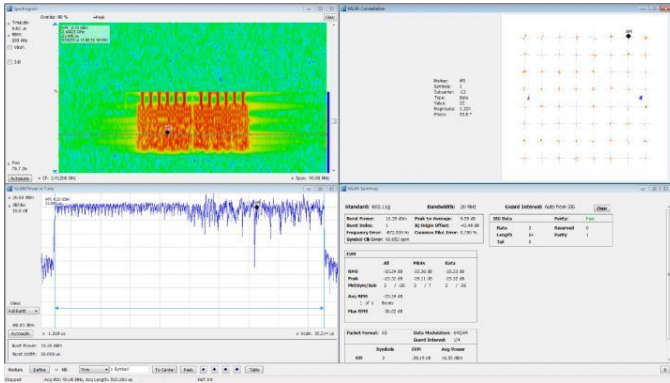


SignalVu-PC Option MAP enables interference hunting and signal strength analysis. Locate interference with azimuth direction function. It lets you draw a line or an arrow on a mapped measurement to indicate the direction your antenna was pointing when you take a measurement. You can also create and display measurement labels.

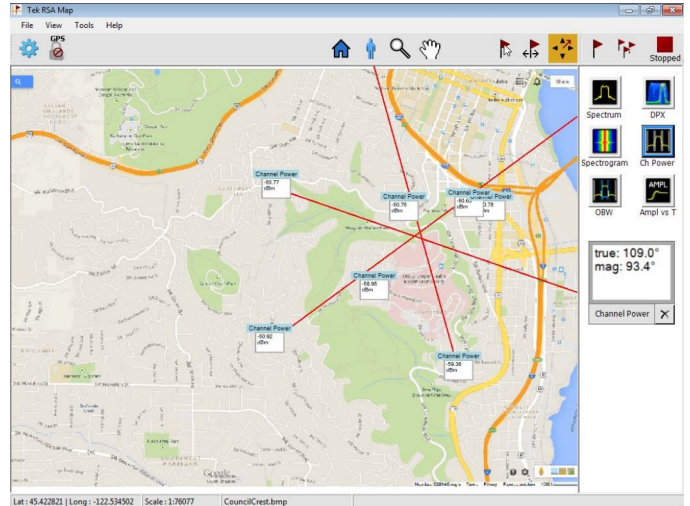

With Option SV27, you can perform Bluetooth SIG standard-based transmitter RF measurements in the time, frequency, and modulation domains. This option supports Basic Rate and Low Energy Transmitter measurements defined by Bluetooth SIG Test Specification RF.TS.4.1.1 for Basic Rate and RF-PHY.TS.4.1.1 for Bluetooth Low Energy. Option SV27 also automatically detects Enhanced Data Rate packets, demodulates them and provides symbol information. Data packet fields are color encoded in the Symbol table for clear identification.

Pass/Fail results are provided with customizable limits and the Bluetooth presets make the different test set-ups push-button. The measurement below shows deviation vs. time, frequency offset and drift, and a measurement summary with pass/fail results.

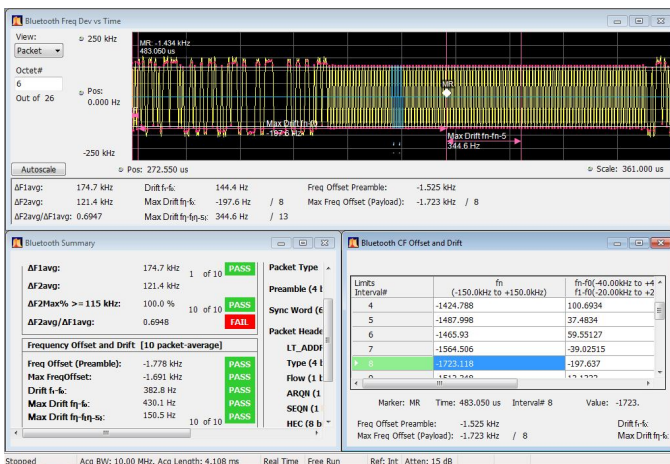

# Specifications

Specifications are valid within the following conditions:

- Operate the instrument in an environment that meets the temperature, altitude, and humidity characteristics listed in these specifications.
- Warm up time is 30 minutes after connecting to the PC and starting the SignalVu application.

## Frequency

<b>RF input frequency range</b>	9 kHz to 6.2 GHz
<b>Frequency reference accuracy</b>	
<b>Initial</b>	±3 ppm + aging (18 °C to 28 °C ambient, after 20 minute warm up) ±25 ppm + aging (-10 °C to 55 °C ambient, after 20 minute warm up), typical
<b>Aging (typical)</b>	±3 ppm (1st year), ±1 ppm/year thereafter
<b>External frequency reference input</b>	
<b>Input frequency range</b>	10 MHz ±10 Hz
<b>Input level range</b>	-10 dBm to +10 dBm sinusoid
<b>Impedance</b>	50 Ω
<b>Center frequency resolution</b>	
<b>Block IQ samples</b>	1 Hz
<b>Streamed ADC samples</b>	500 kHz

## Amplitude

<b>RF input impedance</b>	50 Ω
<b>RF input VSWR (typical)</b>	≤ 1.8:1 (10 MHz to 6200 MHz, reference level ≥ +10 dBm)
<b>Maximum RF input level without damage</b>	
<b>DC voltage</b>	±40 V <sub>DC</sub>
<b>Reference level ≥ -10 dBm</b>	+23 dBm (continuous or peak)
<b>Reference level &lt; -10 dBm</b>	+15 dBm (continuous or peak)
<b>Maximum RF input operating level</b>	The maximum level at the RF input for which the instrument will meet its measurement specifications.
<b>Center frequency &lt; 22 MHz (low-frequency path)</b>	+15 dBm
<b>Center frequency ≥ 22 MHz (RF path)</b>	+20 dBm

<b>Amplitude accuracy at all center frequencies</b>	Center frequency	Warranted (18 °C to 28 °C)	Typical (95% confidence) (18 °C to 28 °C)	Typical (-10 °C to 55 °C)
	9 kHz - < 3 GHz	±2.0 dB	±1.25 dB	±3.0 dB
	≥ 3 GHz - 6.2 GHz	±2.75 dB	±2.0 dB	±3.0 dB

Reference level +20 dBm to -30 dBm, alignment run prior to testing.

Applies to corrected IQ data, with signal to noise ratios > 40 dB.

Accuracy may degrade up to ±0.6 dB after storage at maximum storage temperature, recovers within 24 hours

## Intermediate frequency and acquisition system

<b>IF bandwidth</b>	40 MHz
<b>ADC sample rate and bit width</b>	112 Ms/s, 14 bits
<b>Real-time IF acquisition data (uncorrected)</b>	112 Ms/s, 16-bit integer real samples 40 MHz BW, 28 ±0.25 MHz Digital IF, uncorrected. Corrected values are stored with saved files Block streaming data at an average rate of 224 MB/s
<b>Block baseband acquisition data (corrected)</b>	
<b>Maximum acquisition time</b>	1 second
<b>Bandwidths</b>	≤ 40 / (2 <sup>N</sup> ) MHz, 0 Hz Digital IF, N ≥ 0
<b>Sample rates</b>	≤ 56 / (2 <sup>N</sup> ) Msps, 32-bit float complex samples, N ≥ 0
<b>Channel amplitude flatness</b>	±1.0 dB, 18 °C to 28 °C ±2.0 dB, -10 °C to 55 °C, typical Reference level +10 dBm to -30 dBm, alignment run before testing Applies to corrected IQ data, with signal to noise ratios > 40 dB

## Trigger

<b>Trigger/sync input</b>	
<b>Voltage range</b>	TTL, 0.0 V – 5.0 V
<b>Trigger level, positive-going threshold voltage</b>	1.6 V minimum; 2.1 V maximum
<b>Trigger level, negative-going threshold voltage</b>	1.0 V minimum; 1.35 V maximum
<b>Impedance</b>	10 kΩ
<b>IF power trigger</b>	
<b>Threshold range</b>	0 dB to -50 dB from reference level, for trigger levels > 30 dB above the noise floor
<b>Type</b>	Rising or falling edge
<b>Trigger re-arm time</b>	≤100 μs

## Noise and distortion

**Displayed Average Noise Level (DANL)** Reference level = -50 dBm, input terminated with 50 Ω load, log-average detection (10 averages)

Center frequency	Frequency range	DANL (dBm/Hz)	DANL (dBm/Hz), typical
< 22 MHz (LF path)	100 kHz - 42 MHz	-130	-133
≥ 22 MHz (RF path)	2 MHz - 5 MHz	-145	-148
	> 5 MHz - 1.0 GHz	-160	-163
	> 1.0 GHz - 2.0 GHz	-158	-161
	> 2.0 GHz - 4.0 GHz	-155	-158
	> 4.0 GHz - 6.2 GHz	-150	-153

## Noise and distortion

### Phase noise

Phase noise measured with 1 GHz CW signal at 0 dBm

The following table entries are in dBc/Hz units

Offset	Center frequency				
	1 GHz	10 MHz (typical)	1 GHz (typical)	2.5 GHz (typical)	6 GHz (typical)
1 kHz	-80	-108	-88	-75	-70
10 kHz	-84	-118	-87	-80	-75
100 kHz	-90	-120	-92	-90	-85
1 MHz	-110	-122	-120	-110	-105

### Residual spurious response

< -85 dBm (Reference level  $\leq$  -50 dBm, RF input terminated with 50  $\Omega$ )

Exceptions: < -78 dBm: Harmonics of 112 MHz in the range 1680-2688 MHz; 4750, 4905-4965 MHz

### Input related spurious response (SFDR)

$\leq$  -50 dBc, 18 °C to 28 °C, with auto settings on and signals 10 dB below reference level of -30 dBm

$\leq$  -50 dBc, -10 °C to 55 °C, typical, with auto settings on and signals 10 dB below reference level, reference level -30 dBm)

Exceptions, typical:

IF feedthrough:  $\leq$  -30 dBc for 2340 MHz - 2420 MHz

Image:  $\leq$  -30 dBc for 4570 MHz - 4760 MHz;  $\leq$  -45 dBc for 2860 MHz - 3460 MHz

RFx2LO:  $\leq$  -40 dBc for 1850-1960, 3700-4000 MHz; -45 dBc for 3890 – 3910 MHz

2RFx2LO:  $\leq$  -45 dBc for 2140, 4270 MHz

### Residual FM

< 10 Hz<sub>p,p</sub> (95% confidence)

### 3<sup>RD</sup> order IM distortion

Two input CW signals, 1 MHz separation, each input signal level 5 dB below the reference level setting at the RF input

Reference level at -15 dBm disables Preamp; reference level at -30 dBm enables Preamp

#### Center frequency 2130 MHz

$\leq$  -60 dBc at reference level -15 dBm, 18 °C to 28 °C

$\leq$  -60 dBc, at reference level -15 dBm, -10 °C to 55 °C, typical

#### 40 MHz to 6.2 GHz, typical

< -58 dBc at reference level = -10 dBm

< -50 dBc at reference level = -50 dBm

### 3<sup>RD</sup> order intercept (TOI)

#### Center frequency 2130 MHz

$\geq$  +10 dBm at reference level -15 dBm, 18 °C to 28 °C

$\geq$  +10 dBm, at reference level -15 dBm, -10 °C to 55 °C, typical

#### 40 MHz to 6.2 GHz, typical

+14 dBm at reference level -10 dBm

-30 dBm at reference level -50 dBm

### 2<sup>ND</sup> harmonic distortion, typical

< -55 dBc, 10 MHz to 300 MHz, reference level = 0 dBm

< -60 dBc, 300 MHz to 3.1 GHz, reference level = 0 dBm

< -50 dBc, 10 MHz to 3.1 GHz, reference level = -40 dBm

Exception: < -45 dBc in the range 1850-2330 MHz

# RSA306 USB Spectrum Analyzer

## Noise and distortion

<b>2<sup>ND</sup> harmonic intercept (SHI)</b>	+55 dBm, 10 MHz to 300 MHz, reference level = 0 dBm
	+60 dBm, 300 MHz to 3.1 GHz, reference level = 0 dBm
	+10 dBm, 10 MHz to 3.1 GHz, reference level = -40 dBm
	Exception: < +5 dBm in the range 1850-2330 MHz

---

<b>Local oscillator feedthrough to input connector</b>	< -75 dBm at reference level = -30 dBm
--	--

---

## Audio Output

Audio output (from SignalVu-PC or application programming interface)

<b>Types</b>	AM, FM
<b>IF bandwidth range</b>	Five selections, 8 kHz – 200 kHz
<b>Audio output frequency range</b>	50 Hz – 10 kHz
<b>PC audio output</b>	16 bits at 32 ks/s
<b>Audio file output format</b>	.wav format, 16 bit, 32 ks/s

---

## SignalVu-PC base performance summary

Selected SignalVu-PC features when used with the RSA306. See the SignalVu-PC datasheet for more information on the application features.

### SignalVu-PC/RSA306 key characteristics

<b>Maximum span</b>	40 MHz real-time 9 kHz - 6.2 GHz swept
<b>Maximum acquisition time</b>	1.0 s
<b>Minimum IQ resolution</b>	17.9 ns (acquisition BW = 40 MHz)

---

### Spectrum display

<b>Traces</b>	Three traces + 1 math trace + 1 trace from spectrogram for spectrum display
<b>Trace functions</b>	Normal, Average (VRMS), Max Hold, Min Hold, Average of Logs
<b>Detector</b>	Average (VRMS), Average, CISPR peak, +Peak, -Peak, Sample
<b>Spectrum trace length</b>	801, 2401, 4001, 8001, 10401, 16001, 32001, and 64001 points
<b>RBW range</b>	10 Hz to 10 MHz

---

### DPX spectrum display

<b>Spectrum processing rate (RBW = auto, trace length 801)</b>	10,000/s
<b>DPX bitmap resolution</b>	201x801
<b>Marker information</b>	Amplitude, frequency, signal density
<b>Minimum signal duration for 100% probability of detection</b>	100 $\mu$ s Span: 40 MHz, RBW = Auto, Max-hold on  Due to the non-deterministic execution time of programs running under the Microsoft Windows OS, this specification may not be met when the host PC is heavily loaded with other processing tasks
<b>Span range (continuous processing)</b>	1 kHz to 40 MHz
<b>Span range (swept)</b>	Up to maximum frequency range of instrument
<b>Dwell time per step</b>	50 ms to 100 s



### SignalVu-PC base performance summary

<b>Trace processing</b>	Color-graded bitmap, +Peak, -Peak, average
<b>Trace length</b>	801, 2401, 4001, 10401
<b>RBW range</b>	1 kHz to 10 MHz
<b>DPX Spectrogram display</b>	
<b>Trace detection</b>	+Peak, -Peak, Average( $V_{RMS}$ )
<b>Trace length, memory depth</b>	801 (60,000 traces) 2401 (20,000 traces) 4001 (12,000 traces)
<b>Time resolution per line</b>	50 ms to 6400 s, user selectable
<b>Analog modulation analysis (standard)</b>	
<b>AM demodulation accuracy, typical</b>	$\pm 2\%$ 0 dBm input at center, carrier frequency 1 GHz, 1kHz/5kHz input/modulated frequency, 10% to 60% modulation depth 0 dBm input power level, reference level = 10 dBm
<b>FM demodulation accuracy, typical</b>	$\pm 3\%$ 0 dBm input at center, carrier frequency 1 GHz, 400Hz/1kHz input/modulated frequency 0 dBm input power level, reference level = 10 dBm
<b>PM demodulation accuracy, typical</b>	$\pm 1\%$ of measurement bandwidth 0 dBm input at center, carrier frequency 1 GHz, 1kHz/5kHz input/modulated frequency 0 dBm input power level, reference level = 10 dBm

### SignalVu-PC options

<b>AM/FM/PM and direct audio measurement (Option SVA)</b>	
<b>Carrier frequency range (for modulation and audio measurements)</b>	(1/2 × audio analysis bandwidth) to maximum input frequency
<b>Maximum audio frequency span</b>	10 MHz
<b>FM measurements (Mod. index &gt;0.1)</b>	Carrier Power, Carrier Frequency Error, Audio Frequency, Deviation (+Peak, -Peak, Peak-Peak/2, RMS), SINAD, Modulation Distortion, S/N, Total Harmonic Distortion, Total Non-harmonic Distortion, Hum and Noise
<b>AM measurements</b>	Carrier Power, Audio Frequency, Modulation Depth (+Peak, -Peak, Peak-Peak/2, RMS), SINAD, Modulation Distortion, S/N, Total Harmonic Distortion, Total Non-harmonic Distortion, Hum and Noise
<b>PM measurements</b>	Carrier Power, Carrier Frequency Error, Audio Frequency, Deviation (+Peak, -Peak, Peak-Peak/2, RMS), SINAD, Modulation Distortion, S/N, Total Harmonic Distortion, Total Non-harmonic Distortion, Hum and Noise

# RSA306 USB Spectrum Analyzer

## SignalVu-PC options

**Direct audio measurements** Signal power, Audio frequency (+Peak, -Peak, Peak-Peak/2, RMS), SINAD, Modulation distortion, S/N, Total harmonic distortion, Total non-harmonic distortion, Hum and Noise

**Audio filters** Low pass: 0.3, 3, 15, 30, 80, 300, and user-entered up to  $0.9 \times$  audio bandwidth

High pass: 20, 50, 300, 400, and user-entered up to  $0.9 \times$  audio bandwidth

Standard: CCITT, C-Message

De-emphasis ( $\mu$ s): 25, 50, 75, 750, and user-entered

File: User-supplied .TXT or .CSV file of amplitude/frequency pairs. Maximum 1000 pairs

Performance characteristics, typical	Conditions: Unless otherwise stated, performance is given for: Modulation rate = 5 kHz AM depth: 50% PM deviation 0.628 Radians			
	FM	AM	PM	Conditions
Carrier Power accuracy	Refer to instrument amplitude accuracy			
Carrier Frequency accuracy	$\pm 7$ Hz + (transmitter frequency $\times$ ref. freq. error)	Refer to instrument frequency accuracy	$\pm 2$ Hz + (transmitter frequency $\times$ ref. freq. error)	FM deviation: 5 kHz / 100 kHz
Depth of Modulation accuracy	NA	$\pm 0.5\%$	NA	Rate: 5 kHz Depth: 50%
Deviation accuracy	$\pm (2\% \times (\text{rate} + \text{deviation}))$	NA	$\pm 3\%$	FM deviation: 100 kHz
Rate accuracy	$\pm 0.2$ Hz	$\pm 0.2$ Hz	$\pm 0.2$ Hz	FM deviation: 5 kHz / 100 kHz
Residual THD	0.5%	0.5%	NA	FM Deviation: 5 kHz / 100 kHz Rate: 1 kHz
Residual SINAD	49 dB 40 dB	56 dB	42 dB	FM deviation 5 kHz FM deviation 100 kHz Rate: 1 kHz

### Pulse measurements (Option SVP)

**Measurements (nominal)** Average On Power, Peak Power, Average Transmitted Power, Pulse Width, Rise Time, Fall Time, Repetition Interval(seconds), Repetition Interval (Hz), Duty Factor (%), Duty Factor (ratio), Ripple, Droop, Pulse-Pulse Frequency Difference, Pulse-Pulse Phase Difference, RMS Frequency Error, Max Frequency Error, RMS Phase Error, Max Phase Error, Frequency Deviation, Phase Deviation, Time Stamp, Delta Frequency, Impulse Response, Overshoot

**Minimum pulse width for detection** 150 ns

**Average ON power at 18 °C to 28 °C, typical**  $\pm 1.0$  dB + absolute amplitude accuracy  
For pulses of 300 ns width or greater, duty cycles of .5 to .001, and S/N ratio  $\geq 30$  dB

**Duty factor, typical**  $\pm 0.2\%$  of reading  
For pulses of 450 ns width or greater, duty cycles of .5 to .001, and S/N ratio  $\geq 30$  dB

**Average transmitted power, typical**  $\pm 1.0$  dB + absolute amplitude accuracy  
For pulses of 300 ns width or greater, duty cycles of .5 to .001, and S/N ratio  $\geq 30$  dB

**Peak pulse power, typical**  $\pm 1.5$  dB + absolute amplitude accuracy  
For pulses of 300 ns width or greater, duty cycles of .5 to .001, and S/N ratio  $\geq 30$  dB

**Pulse width, typical**  $\pm 0.25\%$  of reading  
For pulses of 450 ns width or greater, duty cycles of .5 to .001, and S/N ratio  $\geq 30$  dB

## SignalVu-PC options

### General purpose digital modulation analysis (Option SVM)

<b>Modulation formats</b>	BPSK, QPSK, 8PSK, 16QAM, 32QAM, 64QAM, 128QAM, 256QAM, PI/2DBPSK, DQPSK, PI/4DQPSK, D8PSK, D16PSK, SBPSK, OQPSK, SOQPSK, 16-APSK, 32-APSK, MSK, GFSK, CPM, 2FSK, 4FSK, 8FSK, 16FSK, C4FM
<b>Analysis period</b>	Up to 81,000 samples
<b>Measurement filter</b>	Root Raised Cosine, Raised Cosine, Gaussian, Rectangular, IS-95 TX_MEA, IS-95 Base TXEQ_MEA, None
<b>Reference Filter</b>	Gaussian, Raised Cosine, Rectangular, IS-95 REF, None
<b>Filter rolloff factor</b>	$\alpha$ : 0.001 to 1, in 0.001 steps
<b>Measurements</b>	Constellation, Demod I&Q vs. Time, Error Vector Magnitude (EVM) vs. Time, Eye Diagram, Frequency Deviation vs. Time, Magnitude Error vs. Time, Phase Error vs. Time, Signal Quality, Symbol Table, Trellis Diagram
<b>Symbol rate range</b>	1 k symbols/s to 40 M symbols/s  Modulated signal must be contained entirely within the acquisition bandwidth
<b>Adaptive equalizer</b>	Linear, Decision-Directed, Feed-Forward (FIR) equalizer with coefficient adaptation and adjustable convergence rate. Supports modulation types BPSK, QPSK, OQPSK, $\pi/2$ -DBPSK, $\pi/4$ -DQPSK, 8-PSK, 8-DSPK, 16-DPSK, 16/32/64/128/256-QAM, 16/32-APSK
<b>QPSK Residual EVM (center frequency = 2 GHz), typical</b>	1.1 % (100 kHz symbol rate) 1.1 % (1 MHz symbol rate) 1.2 % (10 MHz symbol rate) 2.5 % (30 MHz symbol rate)  400 symbols measurement length, 20 Averages, normalization reference = maximum symbol magnitude
<b>256 QAM Residual EVM (center frequency = 2 GHz), typical</b>	0.8 % (10 MHz symbol rate) 1.5 % (30 MHz symbol rate)  400 symbols measurement length, 20 Averages, normalization reference = maximum symbol magnitude

### WLAN Measurements, 802.11a/b/g/j/p (Option SV23)

<b>Measurements</b>	WLAN power vs. time; WLAN symbol table; WLAN constellation; spectrum emission mask; error vector magnitude (EVM) vs. symbol (or time), vs subcarrier (or frequency); mag error vs symbol (or time), vs. subcarrier (or frequency); phase error vs symbol (or time), vs. subcarrier (or frequency); channel frequency response vs. symbol (or time), vs. subcarrier (or frequency); spectral flatness vs. symbol (or time), vs. subcarrier (or frequency)
<b>Residual EVM - 802.11a/g/j /p (OFDM), 64-QAM, typical</b>	2.4 GHz, 20 MHz BW: -38 dB 5.8 GHz, 20 MHz BW: -38 dB  Input signal level optimized for best EVM, average of 20 bursts, $\geq 16$ symbols each
<b>Residual EVM - 802.11b, CCK-11, typical</b>	2.4 GHz, 11 Mbps: 2.0 %  Input signal level optimized for best EVM, average of 1,000 chips, BT = .61

### WLAN Measurements 802.11n (Option SV24)

<b>Measurements</b>	WLAN power vs. time; WLAN symbol table; WLAN constellation; spectrum emission mask; error vector magnitude (EVM) vs. symbol (or time), vs subcarrier (or frequency); mag error vs symbol (or time), vs. subcarrier (or frequency); phase error vs symbol (or time), vs. subcarrier (or frequency); channel frequency response vs. symbol (or time), vs. subcarrier (or frequency); spectral flatness vs. symbol (or time), vs. subcarrier (or frequency)
<b>EVM performance - 802.11n, 64-QAM, typical</b>	2.4 GHz, 40 MHz BW: -35 dB 5.8 GHz, 40 MHz BW: -35 dB  Input signal level optimized for best EVM, average of 20 bursts, $\geq 16$ symbols each

# RSA306 USB Spectrum Analyzer

## SignalVu-PC options

### WLAN Measurements 802.11ac (Option SV25)

<b>Measurements</b>	WLAN power vs. time; WLAN symbol table; WLAN constellation; spectrum emission mask; error vector magnitude (EVM) vs. symbol (or time), vs subcarrier (or frequency); mag error vs symbol (or time), vs. subcarrier (or frequency); phase error vs symbol (or time), vs. subcarrier (or frequency); channel frequency response vs. symbol (or time), vs. subcarrier (or frequency); spectral flatness vs. symbol (or time), vs. subcarrier (or frequency)
<b>EVM performance - 802.11ac, 256-QAM, typical</b>	5.8 GHz, 40 MHz BW : -35 dB Input signal level optimized for best EVM, average of 20 bursts, $\geq 16$ symbols each

### APCO P25 Measurements (Option SV26)

<b>Measurements</b>	RF output power, operating frequency accuracy, modulation emission spectrum, unwanted emissions spurious, adjacent channel power ratio, frequency deviation, modulation fidelity, frequency error, eye diagram, symbol table, symbol rate accuracy, transmitter power and encoder attack time, transmitter throughput delay, frequency deviation vs. time, power vs. time, transient frequency behavior, HCPM transmitter logical channel peak adjacent channel power ratio, HCPM transmitter logical channel off slot power, HCPM transmitter logical channel power envelope, HCPM transmitter logical channel time alignment, cross-correlated markers
<b>Modulation fidelity, typical</b>	C4FM = 1.3% HCPM = 0.8% HDQPSK = 2.5% Input signal level is optimized for best modulation fidelity.

### Bluetooth Measurements (Option SV27)

<b>Modulation formats</b>	Basic Rate, Bluetooth Low Energy, Enhanced Data Rate - Revision 4.1.1
<b>Measurements</b>	Peak Power, Average Power, Adjacent Channel Power or InBand Emission mask, -20dB Bandwidth, Frequency Error, Modulation Characteristics including $\Delta F1_{avg}$ (11110000), $\Delta F2_{avg}$ (10101010), $\Delta F2 > 115$ kHz, $\Delta F2/\Delta F1$ ratio, frequency deviation vs. time with packet and octet level measurement information, Carrier Frequency $f_0$ , Frequency Offset (Preamble and Payload), Max Frequency Offset, Frequency Drift $f_1-f_0$ , Max Drift Rate $f_n-f_0$ and $f_n-f_{n-5}$ , Center Frequency Offset Table and Frequency Drift table, color-coded Symbol table, Packet header decoding information, eye diagram, constellation diagram
<b>Output power, In-band emissions and ACP</b>	Level uncertainty: refer to instrument amplitude and flatness specification Measurement range: signal level $> -70$ dBm
<b>Modulation characteristics</b>	Deviation range: $\pm 280$ kHz Deviation uncertainty (at 0 dBm) 2 kHz + instrument frequency uncertainty (basic rate) 3 kHz + instrument frequency uncertainty (low energy) Measurement range: Nominal channel frequency $\pm 100$ kHz
<b>Initial Carrier Frequency Tolerance (ICFT)</b>	Measurement uncertainty (at 0 dBm): $< 1$ kHz + instrument frequency uncertainty Measurement range: Nominal channel frequency $\pm 100$ kHz
<b>Carrier Frequency Drift</b>	Measurement uncertainty: $< 2$ kHz + instrument frequency uncertainty Measurement range: Nominal channel frequency $\pm 100$ kHz

### Mapping

<b>Supported map types</b>	Pitney Bowes MapInfo (*.mif), Bitmap (*.bmp)
<b>Saved measurement results</b>	Measurement data files (exported results)

### SignalVu-PC options

<b>Map file used for the measurements</b>	Google Earth KMZ file
<b>Recallable results files (trace and setup files)</b>	MapInfo-compatible MIF/MID files
<b>RF signal strength</b>	
<b>Signal strength indicator</b>	Located at right side of display
<b>Measurement bandwidth</b>	Up to 40 MHz, dependent on span and RBW setting
<b>Tone type</b>	Variable frequency based on received signal strength

### Inputs, outputs, interfaces

<b>RF input</b>	Type N, female
<b>External frequency reference input</b>	SMA, female
<b>Trigger/sync input</b>	SMA, female
<b>Status indicator</b>	LED, dual color red/green
<b>USB device port</b>	USB 3.0 - Micro-B

### Physical characteristics

<b>Dimensions</b>	
<b>Height</b>	30.5 mm (1.2 in)
<b>Width</b>	190.5 mm (7.5 in)
<b>Depth</b>	127 mm (5 in)
<b>Weight</b>	0.59 kg (1.3 lbs)

### Regulatory

<b>Safety</b>	UL61010-1, CAN/CSA-22.2 No.61010-1, EN61010-1, IEC61010-1
<b>Regional certifications</b>	Europe: EN61326 Australia/New Zealand: AS/NZS 2064
<b>EMC emissions</b>	EN61000-3-2, EN61000-3-3, EN61326-2-1
<b>EMC immunity</b>	EN61326-1/2, IEC61000-4-2/3/4/5/6/8/11



# RSA306 USB Spectrum Analyzer

## Environmental performance

### Temperature

**Operating** -10 °C to +55 °C (+14 °F to +131 °F)

**Nonoperating** -51 °C to +71 °C (-60 °F to +160 °F)

---

### Humidity (operating)

5% to 75% ±5% relative humidity (RH) from +30 °C to +40 °C (+86 °F to 104 °F)

5% to 45% RH above +40 °C to +55 °C (+86 °F to +131 °F)

---

### Altitude

**Operating** Up to 9,144 meters (30,000 feet)

**Nonoperating** 15,240 meters (50,000 feet)

---

### Dynamics

**Mechanical shock, operating** Half-sine mechanical shocks, 30 g peak amplitude, 11 µs duration, three drops in each direction of each axis (18 total)

**Random vibration, nonoperating** 0.030 g<sup>2</sup>/Hz, 10-500 Hz, 30 minutes per axis, three axes (90 minutes total)

---

### Handling and transit

**Bench handling, operating** Per MIL-PRF-28800F Class 2 operating: Rotational-edge-drops of appropriate edges on appropriate sides of the equipment

**Transit drop, nonoperating** Per MIL-PRF-28800F Class 2 nonoperating: Transit drops onto six faces and four corners of the equipment, from a height of 30 cm (11.8 in.) for a total of 10 impacts

---

## Ordering information

### Models

#### RSA306

USB real time spectrum analyzer, 9 kHz - 6.2 GHz, 40 MHz acquisition bandwidth, one-year warranty.

The RSA306 requires a PC with Windows 7 or Windows 8/8.1, 64-bit operating system. A USB 3.0 connection is required for operation of the RSA306. 8 GB RAM and 20 GB free drive space is required for installation of SignalVu-PC. For full performance of the real time features of the RSA306, an Intel Core i7 4th generation processor is required. Processors of lower performance can be used, with reduced real-time performance.

Storage of streaming data requires that the PC be equipped with a drive capable of streaming storage rates of 300 MB/sec.

### Standard accessories

#### 174-6584-xx

USB 3.0 cable (1 M)

#### 063-4543-xx

SignalVu-PC software, documentation, USB key

#### 071-3323-xx

Printed safety/installation manual (English)

### Warranty

#### Warranty

1 year

## SignalVu-PC application-specific options

SignalVu-PC-SVE requires the Microsoft Windows 7 or 8/8.1, 64-bit operating system. The base software is free, included with the instrument, and is also available to download from [www.tek.com](http://www.tek.com). Option keys are sent by email which you then enter into the application. Fully functional trial options can be activated locally for 30 days.

The following SignalVu-PC-SVE options add functionality and value to your measurement solution:

<b>Option SVA</b>	AM/FM/PM/Direct audio analysis
<b>Option SVT</b>	Settling Time (frequency and phase) measurement
<b>Option SVM</b>	General purpose modulation analysis
<b>Option SVP</b>	Advanced Signal Analysis (including pulse measurements)
<b>Option SVO</b>	Flexible OFDM Analysis
<b>Option SV23</b>	WLAN 802.11a/b/g/j/p measurement application
<b>Option SV24</b>	WLAN 802.11n measurement application (requires option SV23)
<b>Option SV25</b>	WLAN 802.11ac measurement application (requires option SV24). Limited to 40 MHz bandwidth on RSA306
<b>Option SV26</b>	APCO P25 measurement application
<b>Option SV27</b>	Bluetooth Basic LE Tx measurement
<b>Option MAP</b>	Mapping and signal strength
<b>Option CON</b>	SignalVu-PC live link to the MDO4000B series mixed-domain oscilloscopes
<b>Option SIGNALVU-PC-SVE SV2C</b>	Live Link to MDO4000B and WLAN 802.11a/b/g/j/p/n/ac measurements (includes options CON, SV23, SV24 and SV25)

## Service options

<b>Opt. C3</b>	Calibration Service 3 Years
<b>Opt. C5</b>	Calibration Service 5 Years
<b>Opt. D1</b>	Calibration Data Report
<b>Opt. D3</b>	Calibration Data Report 3 Years (with Opt. C3)
<b>Opt. D5</b>	Calibration Data Report 5 Years (with Opt. C5)
<b>Opt. R3</b>	Repair Service 3 Years (including warranty)
<b>Opt. R5</b>	Repair Service 5 Years (including warranty)

## Recommended accessories

<b>RSA300CASE</b>	Soft case with shoulder-strap
<b>RSA300TRANSIT</b>	Hard-sided transit case for RSA300 with room for USB cable and small accessories. Pelican model Stormcase iM2100
<b>RSA306RACK</b>	Rackmount with slots for two RSA306. 19 inch rack with cover for unused slot
<b>119-6609-xx</b>	BNC whip antenna
<b>103-0045-xx</b>	N-BNC adapter
<b>119-6594-xx</b>	Beam antenna, 824 MHz to 896 MHz
<b>119-6595-xx</b>	Beam antenna, 896 MHz to 960 MHz
<b>119-6596-xx</b>	Beam antenna, 1710 MHz to 1880 MHz
<b>119-6597-xx</b>	Beam antenna, 1850 MHz to 1990 MHz
<b>119-6970-xx</b>	Magnetic mount antenna, 824 MHz to 2170 MHz (requires adapter 103-0449-00)
<b>119-7246-xx</b>	Pre-filter, general purpose, 824 MHz to 2500 MHz, Type-N (f) connector
<b>119-7426-xx</b>	Pre-filter, general purpose, 2400 MHz to 6200 MHz, Type-N (f) connector
<b>012-0482-xx</b>	Cable, 50 $\Omega$ , BNC (m) 3 foot (91 cm)
<b>174-4977-xx</b>	Cable, 50 $\Omega$ , straight Type-N (m) and angled Type-N (m) connector, 1.6 foot (50 cm)
<b>174-5002-xx</b>	Cable, 50 $\Omega$ , Type-N (m) to Type-N (m) connector, 3 foot (91 cm)
<b>119-4146-xx</b>	EMCO E/H-field probes
<b>10 dB 2W pad, SMA M-F</b>	Available from Pasternack <a href="http://www.pasternack.com/10db-fixed-sma-male-sma-female-2-watts-attenuator-pe7045-10-p.aspx">http://www.pasternack.com/10db-fixed-sma-male-sma-female-2-watts-attenuator-pe7045-10-p.aspx</a>
<b>E/H field probes, lower cost alternative</b>	Available from Beehive <a href="http://beehive-electronics.com/">www. http://beehive-electronics.com/</a>



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.



Product Area Assessed: The planning, design/development and manufacture of electronic Test and Measurement instruments.



# RSA306 USB Spectrum Analyzer

ASEAN / Australasia (65) 6356 3900  
Belgium 00800 2255 4835\*  
Central East Europe and the Baltics +41 52 675 3777  
Finland +41 52 675 3777  
Hong Kong 400 820 5835  
Japan 81 (3) 6714 3010  
Middle East, Asia, and North Africa +41 52 675 3777  
People's Republic of China 400 820 5835  
Republic of Korea 001 800 8255 2835  
Spain 00800 2255 4835\*  
Taiwan 886 (2) 2656 6688

Austria 00800 2255 4835\*  
Brazil +55 (11) 3759 7627  
Central Europe & Greece +41 52 675 3777  
France 00800 2255 4835\*  
India 000 800 650 1835  
Luxembourg +41 52 675 3777  
The Netherlands 00800 2255 4835\*  
Poland +41 52 675 3777  
Russia & CIS +7 (495) 6647564  
Sweden 00800 2255 4835\*  
United Kingdom & Ireland 00800 2255 4835\*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777  
Canada 1 800 833 9200  
Denmark +45 80 88 1401  
Germany 00800 2255 4835\*  
Italy 00800 2255 4835\*  
Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90  
Norway 800 16098  
Portugal 80 08 12370  
South Africa +41 52 675 3777  
Switzerland 00800 2255 4835\*  
USA 1 800 833 9200

\* European toll-free number. If not accessible, call: +41 52 675 3777

For Further Information, Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit [www.tektronix.com](http://www.tektronix.com).

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.



10 Feb 2015 37W-30767-1

[www.tektronix.com](http://www.tektronix.com)

**Tektronix**<sup>®</sup>

