

NETNode2×15W-5RH


NETNode IP Mesh Radio Phase 5 (Robust High Power 30W)

Overview:

Phase 5 is the latest generation of DTC's NETNode IP Mesh Radio family offering built-in dual HD video encoders and MIMO capability for our highest ever data capacities. IP radios can be combined in a fluid self-forming, self-healing mesh network containing up to 144 nodes depending on operating mode.

The NETNode 5RH is DTC's highest power Mesh product and provides up to 30W total RF power output over two transmit ports for extreme long range applications. The 5RH is ideal for extended outdoor deployment and includes on board video encoding with twin HD-SDI video inputs.

Interoperable with DTC's Phase 3 and 4 Mesh allowing simple upgrade in the field, the NETNode-5RH adds flexibility and ease of use as nodes can be integrated into existing infrastructure, reducing cost and making it easy to expand any network.

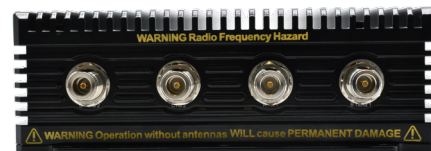

Features and Benefits:

2 x 15W RF transmitters (up to 30W total power)

Self-forming, self-healing Mesh architecture

Ideal for use for wide area coverage and multi-hop, mobile applications such as robotics

Low latency IP communication

Data capacity up to 90Mbps in 20MHz channel bandwidth

Configurable RF bandwidth between 1.25MHz and 20MHz

Interlink mode for enhanced capability and large scale systems

64Gb of on-board storage with store & forward functionality

Built-in encryption (DES as standard, AES128/256 subject to export control)

Mission Commander compatible

Product Information:

Product Includes

CA2585	Microphone/headphone and control/debug screened cable 1m
CA3791	Souriau 3-way circular to banana plugs power cable

Accessory Options (sold separately)

CA3958	Souriau 3-way circular to 24V PSU
CA3959	Souriau 3-way m-f power extension
NETR-HPMB-AS	High power antenna mounting bracket and spacer
MISCDRTAC	Mission Commander Tactical application for desktop or tablet - refer to datasheet
MCS	Mission Commander Strategic advanced client/server application - refer to datasheet
SOL8SDI	HDMI or composite video to SDI converter

NETNode2x15W-5RH

NETNode IP Mesh Radio Phase 5 (Robust High Power 30W)

Technical Specification:

Interfaces

COFDM RF interfaces	N-Type x 4 (2 x Tx/Rx, 2 x Rx)
Power	3-way Souriau UTS7103P
Ethernet0/1	RJ45 x 2
Control and data	22-way Amphenol 38999 series 3
SDI/HD-SDI 1/2	BNC female 75Ω x 2
USB	Type A

IP Interface

Ethernet	100/1000Base-T
IP address allocation	DHCP dynamic IP addressing/static IP

RF Interfaces

Antenna A	Channel 1 receive only
Antenna B	Channel 1 switched transmit/receive
Antenna C	Channel 2 receive only
Antenna D	Channel 2 switched transmit/receive

RF and Modulation

Output frequency	Frequency variant dependent
Tuning step size	125kHz step
Output power	15W per channel max (30W total) - modulation up to 16 QAM (SQT5) 10W per channel max (20W total) - configured for 64QAM Support (SQT6) Power adjustable in 0.25dB steps
Bandwidth	1.25, 1.5, 1.75, 2.5, 3.0, 3.5, 5.0, 6.0, 7.0, 8.0, 10.0MHz (video and IP Mesh) 12.0, 14.0, 16.0, 20.0MHz (IP Mesh only)
Mesh capacity	Up to 87Mbps MIMO*, 17Mbps standard Mesh
Modulation	COFDM 360 carrier modulation
Carrier modulation	BPSK/QPSK/16QAM/64QAM* (adaptive)
FEC rate	FEC1/2, FEC2/3 (adaptive)
Receive diversity	Maximum ratio combining
Receive sensitivity	-98dBm (BW 2.5MHz/QPSK 1/2)

* 64QAM @ 2x10W Output. For 16QAM at 2x15W output, maximum is 62Mbps.

Typical Range

NLOS light urban	4km †
LOS (e.g. ground to air)	300km †

† Dependent on antenna height and gain

Streaming

Format	UDP multicast/unicast RTSP/RTP/UDP multicast/unicast ONVIF Profile S
MJPEG	TCP/HTTP

Video

Video input	Two video streams Max total throughput of 1920x1080p30 Currently both video input resolutions must be identical
SDI input formats	1920x1080i 60/59.94/50Hz 1920x1080p 30/29.97/25/24/23.97Hz 1920x1080psf 30/29.97/25/24/23.97Hz 1280x720p 60/59.94/50Hz 720x576i 50Hz or 720x480i 59.94Hz
Composite input formats	PAL NTSC
H.264 compression	AVC / H.264 / MPEG-4 Part 10 High profile level 4.0
Coding options	Horizontal scaling of 3/4, 2/3, 1/2, 1/4 Vertical scaling of 1/2, 1/4 Sub-frame rate of 1/2, 1/4, 1/8, 1/24
Encoder delay	1s to 10ms (mode dependent)
Encoder bitrates	0.25Mbps to 32Mbps

Audio

Talkback audio input	High gain microphone stereo pair or talkback
Digital audio input	SD/HD-SDI digital stereo pair
Sample rate	16kHz-48kHz
Coding modes	4 channels stereo or mono MPEG Audio Layer 1 64-448kbps MPEG Audio Layer 2 32-384kbps MPEG Audio Layer 3 8-256kbps

Store and Forward Options

Storage format	SD card interface (Secure Digital card) - not user accessible
Record options	Continuous or triggered (Milestone)
Files download	From web browser interface/RTSP
Video and audio clip size	30 seconds

Encryption

Standard	DES
Licensed	AES128/AES256 (subject to export control)

NETNode2x15W-5RH

NETNode IP Mesh Radio Phase 5 (Robust High Power 30W)

Technical Specification (cont.):

Open Audio Comms Channel (shared voice channel)

Multi-user audio comms channel	Interface microphone level/headphone output
Compression	G726 32kbit audio 8kHz sampling and mute

Data Interface

RS232/RS485 bi-directional data (shared with user camera control)	1k2 to 115k2 baud switchable with UDP and TCP routing protocol
---	--

Camera Interface

User camera type	Two HD-SDI or SD-SDI
User camera control	Mission Commander PC application using VISCA, PELCOD or PELCOP User supplied desk controller (requires RS232/RS485 interface)

Triggers

Trigger source	Video motion detection Brightness
Trigger action	Enable Mesh Record

Control

Local control	LEDs power and Mesh status
Remote control	Web browser GUI Mission Commander - control of all parameters in a map based application

Power

DC input	10-32V (28V nominal)
Power consumed	120W typical (200W peak)

Physical

Dimensions	H 254mm, W 210mm, D 71mm
Mounting options base unit	Through hole screws
Mounting options adaption plate	Post mounting kit
Weight	5kg approx.

Environment

Sealing	IP66 minimum
Temperature range	-20°C to +50°C

Frequency

230250	2.30-2.50GHz
420440	4.20-4.40GHz

Software License Code

Silver (included)	Standard Mesh, MIMO Mesh, DES Encryption, Recording and Streaming
Gold	Silver plus SD H.264 Encoder
Platinum	Gold plus HD H.264 Encoder
IAS-NETNode2x15W-5RH	Interference Avoidance Scheme
L2BRIDGE-NETNode2x15W-5RH	Transparent L2 Bridging Mode
AES128NN	AES 128-Bit Encryption
AES256NN	AES 256-Bit and 128-Bit Encryption

Export of encrypted products is subject to regulatory export controls.

For further information contact your Sales Account Manager, one of our Regional Sales Offices, or email solent.enquiries@domotactical.com

DTC – Herndon (Headquarters)
2303 Dulles Station Boulevard
Suite 205
Herndon, VA
20171, USA

T: +1 800 665 4648

DTC – Tampa
3845 Gateway Centre Boulevard
Suite 360
Pinellas Park, FL
33782, USA

T: +1 727 471 6900

DTC – Solent
Fusion 2, 1100 Parkway
Solent Business Park
Whiteley, Hampshire
PO15 7AB, UK

T: +44 1489 566 750

DTC – Randers
Haraldsvej 64B
DK-8960
Randers SØ
Denmark

T: +45 8791 8100

DTC – Singapore
21 Media Circle
Infinite Studios #05-06
Singapore
138562

T: +65 6339 0508